


Submittal Sheet

Price Web Server

FEATURES:

- INTERFACE TO BACnet IP DEVICES IN BUILDING VIA WEB PAGE
- ADD PRICE BACnet ROUTERS TO NETWORK WITH MS/TP SEGMENTS
- CAN BE CONFIGURED FOR REMOTE ACCESS VIA WEB ADDRESS
- ANIMATED GRAPHIC SCREENS (BUILT-IN TEMPLATES FOR PRICE DEVICES
 I.E. PRTU, PIC AND PRODIGY)
- SUPPORTS USER DEFINED GRAPHICS AND FLOOR PLANS
- PRICE CAN QUOTE AND SUPPLY CUSTOM GRAPHICS



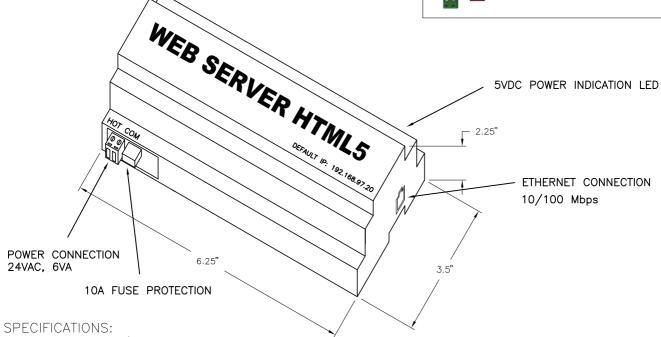

- 24 VAC POWER +/- 10%, 6VA
- [1] ETHERNET PORT 10/100 Mbps (DEFAULT IP ADDRESS: 192.168.97.20)
- SERVES UP WEB PAGES IN ANY BROWSER
- STAND ALONE, WEB BASED GRAPHICAL INTERFACE
- BACNET/IP PROTOCOL
- SCHEDULING
- ALL SETUP AND USER INTERACTION PERFORMED VIA WEB BROWSER
- HISTORICAL TRENDING (SUPPORTS EXPORT TO EXCEL)
- ALARM CONDITION MONITORING WITH EMAIL NOTIFICATION
- USES FLASH MEMORY FOR INTERNAL STORAGE
- MULTIPLE USER PERMISSIONS (BASIC TO ADMINISTRATOR)
- SUPPORTS MULTIPLE SIMULTANEOUS USERS (UP TO 10)
- BATTERY BACKED REAL TIME CLOCK
- 8GB NAND FLASH MEMORY
- STANDARD TS-35 DIN RAIL MOUNT
- SUPPORTS UP TO 3,000 TREE NODES; POINTS, GRAPHICS, TRENDS, ETC. (LIMITS ON CONTROL POINTS DEPEND ON COMMUNICATION SPEED, NETWORK BANDWIDTH USED, AND NUMBER OF POINTS BEING POLLED). PLEASE CONTACT PRICE FOR ADVICE IF YOU NEED MORE THAN 3,000 TREE NODES.

RECOMMENDATIONS:

- OBSERVE "24VAC HOT" AND "COMMON" POLARITY ON ALL NETWORKED DEVICES
- GROUND "24VAC COMMON" TO "EARTH GROUND"
- MAXIMUM RECOMMENDED LENGTH OF ETHERNET (10/100 Mbps) CABLE 328 FEET (100 METERS)
- MUST BE MOUNTED INSIDE ENCLOSURE

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		-	Price*	
ENGINEER:		CSF	WEB SERVER	
CUSTOMER:		270609	PRTU-WEB-SERVER	
SUBMITTAL DATE:	SPEC. SYMBOL:	2020/04/17	250000-954	