



**LDLT, ALDLT LINEAR DIFFUSER
LOW TEMPERATURE**

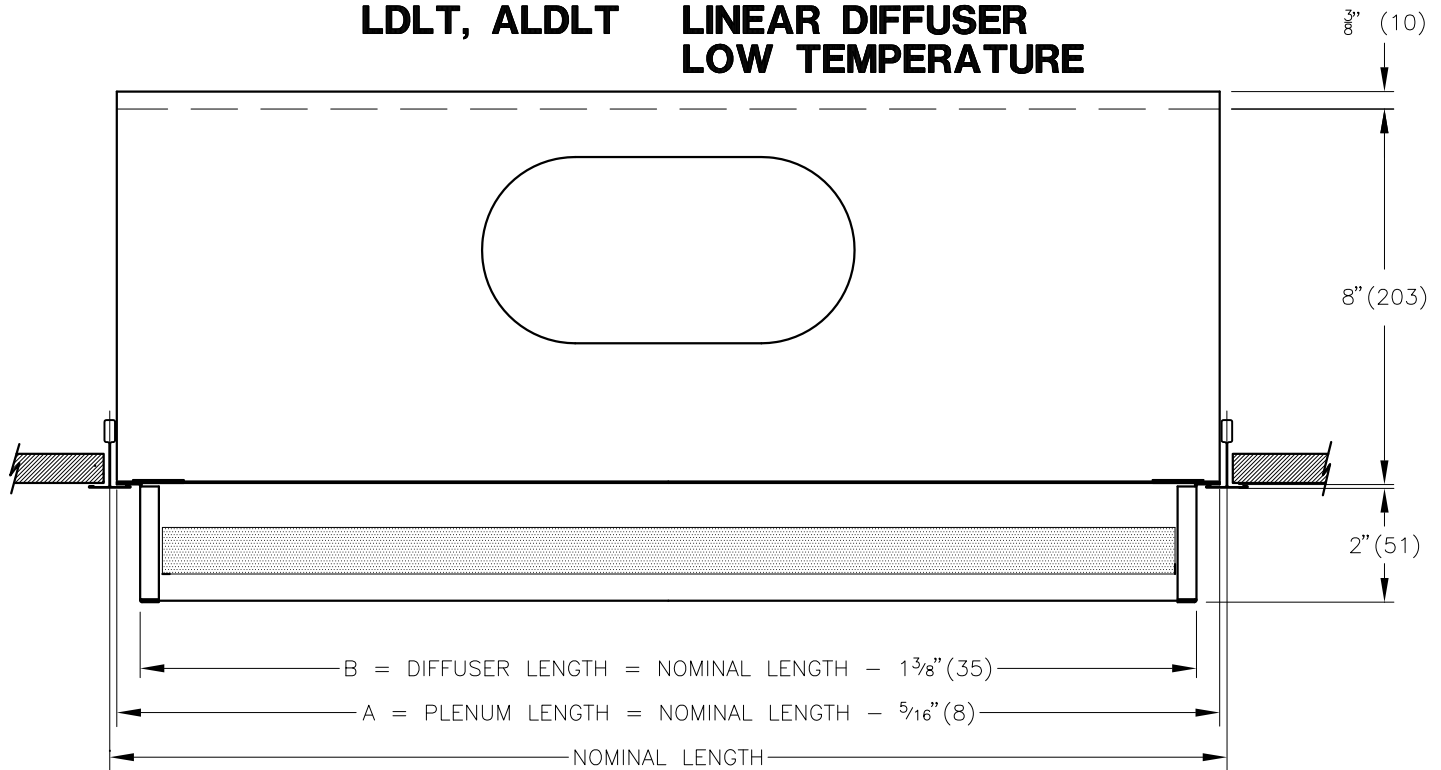

NOM. LENGTH	A	B	INLETS
24" (610)	23 ¹¹ / ₁₆ " (602)	22 ⁵ / ₈ " (575)	4, 6*, 8*
48" (1219)	47 ¹ / ₁₆ " (1211)	46 ⁵ / ₈ " (1184)	6*, 8*, 10*

* - INLET SUPPLIED AS 4" (102) FLAT OVAL
 6" (152) = 4" x 7" (102x178)
 8" (203) = 4" x 10¹/₈" (102x257)
 10" (254) = 4" x 13¹/₄" (102x337)

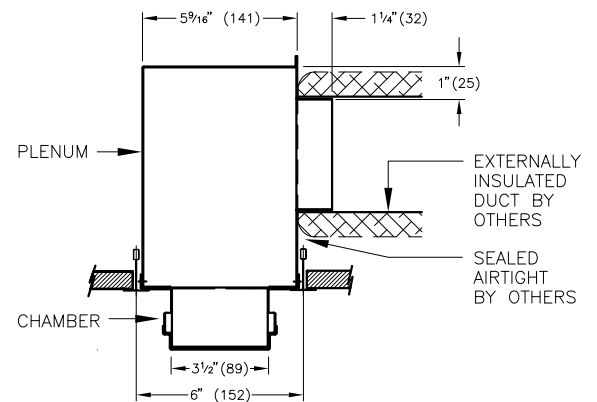

MATERIAL:

MODEL LDLT

- PLENUM - COATED STEEL
- CHAMBER - STEEL CONSTRUCTION.

MODEL ALDLT

- PLENUM - COATED STEEL
- CHAMBER - ALUMINUM CONSTRUCTION.

FINISH:

CHAMBER ONLY

- B12 WHITE
(OPTIONAL FINISHES AVAILABLE)

NOTES:

- PLENUM LINED WITH 3/4" (19) INSULATION
- CHAMBER INTERNALLY INSULATED WITH 1/2" (13) INSULATION
- AIR PATTERNS AVAILABLE:
 - 2W - 2 WAY AIR DISCHARGE
 - 1W-N - 1 WAY AIR DISCHARGE ON INLET SIDE
 - 1W-A - 1 WAY AIR DISCHARGE OPPOSITE INLET SIDE

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:			LDLT, ALDLT LINEAR DIFFUSER LOW TEMPERATURE AIR DISTRIBUTION
CUSTOMER:		225185	
SUBMITTAL DATE:	SPEC. SYMBOL:	2011/08/30	