


4. Secure the controller by installing the screw provided through the anti-rotation slot's bushing and o-ring.

NOTE Center the bushing in the slot. Failure to do so may cause the actuator to stick or bind.

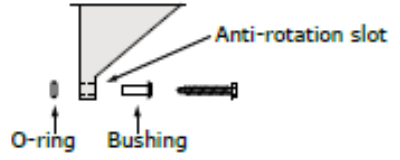

PROJECT:

ENGINEER:

CUSTOMER:

SUBMITTAL DATE:

SPEC. SYMBOL:

W12195

2013/08/23



SDV5000
CARRIER OPN-VAVB1
CLG,
OPT. HW REHEAT
VARIABLE/ CONSTANT VOLUME