

STANDARD CONSTRUCTION

CONSTRUCTION

- ALL WELDED

FRAME

- 5.00in x .081in [127mm x 2.1mm] EXTRUDED ALUMINUM (6063-T5) CHANNEL FRAME

BLADES

- INVERTED V-TYPE RAIN-RESISTANT BLADES, .081in[2.1mm] EXTRUDED ALUMINUM (6063-T5) 35° BLADE ANGLE, 2.00in[51mm] BLADE SPACING

FINISH

- MILL

MINIMUM SECTION SIZE

- 8.00in W x 14.00in H [203mm x 356mm]

MAXIMUM SECTION SIZE

- ONE PIECE CONSTRUCTION 72in W x 72in H [1829mm x 1829mm]
- LARGER LOUVERS WILL REQUIRE FIELD ASSEMBLY OF MULTIPLE SECTIONS AND MAY REQUIRE ADDITIONAL STRUCTURAL SUPPORT BY OTHERS.
- INSTALLATION HARDWARE & STRUCTURAL REINFORCING MEMBERS ARE NOT PROVIDED BY PRICE UNLESS OTHERWISE INDICATED.

SIZING

☐ NOMINAL ☐ ACTUAL

FRAME

☐ CHANNEL ☐ FLANGED

FINISHES

- ☐ MILL ☐ PRIME COAT
- ☐ DURACRON (BAKED ENAMEL) [1]
- ☐ DURANAR (70% PVDF) [1]
- ☐ DURANAR XL (70% PVDF WITH CLEAR TOP COAT) [1]
- ☐ CLEAR ANODIZED ☐ COLOUR ANODIZED [1]



ACCESSORIES

- ☐ BIRD SCREEN ☐ BIRD SCREEN WITH FRAME
- ☐ INSECT SCREEN
- ☐ EXTENDED SILL (LOOSE)
- ☐ BLANK-OFF PANELS
- ☐ INSULATED ☐ NON-INSULATED

[1] REFER TO PRICE COLOUR GUIDES FOR A LIST OF AVAILABLE STANDARD COLOURS: [PAINT & ANODIZED](#)
CONSULT PRICE LOUVERS DEPT. FOR OTHER SPECIAL REQUIREMENTS



CHANNEL FRAME "A" MOUNTING SHOWN
FOR OTHER MOUNTING METHODS SEE [274240](#)

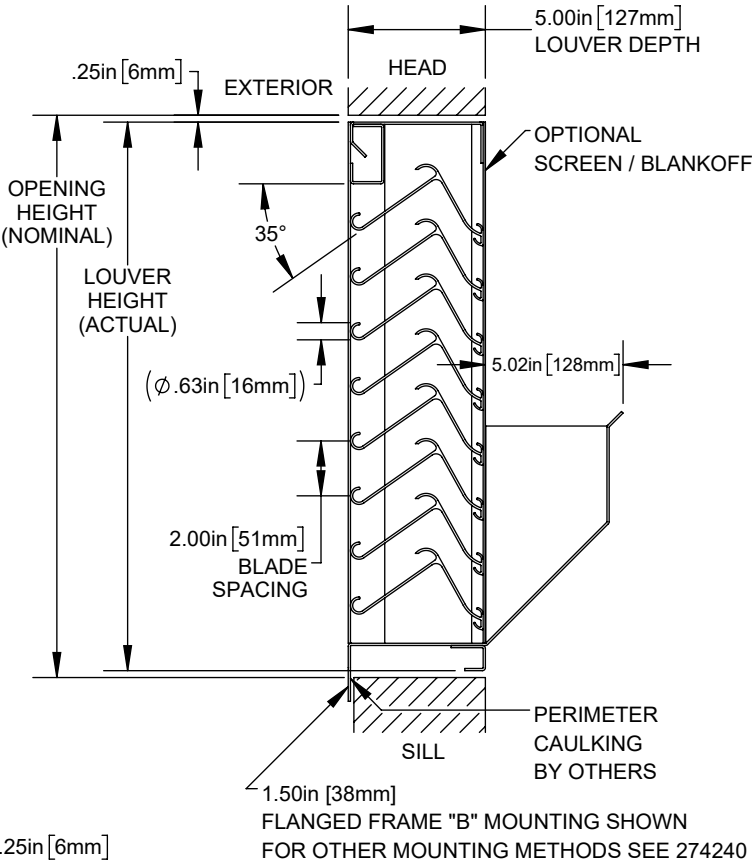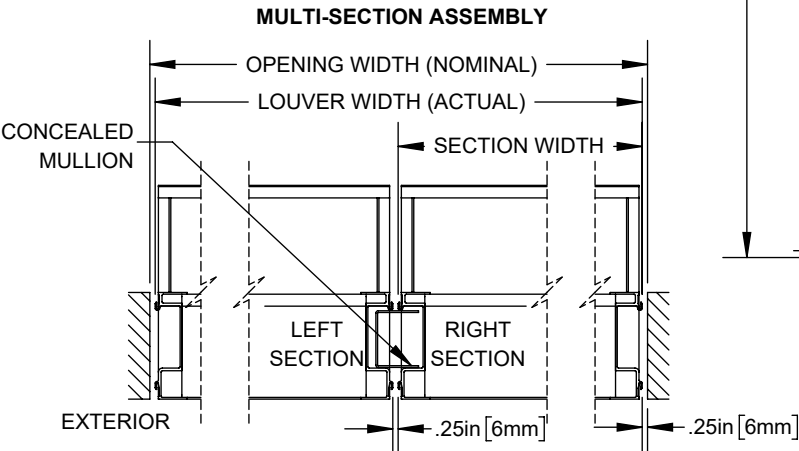

PROJECT:		price	
ENGINEER:		GA	RSE5
CUSTOMER:		236888	5" (127) DEEP, 35° BLADE
SUBMITTAL DATE:	SPEC. SYMBOL:	2024-01-22	EXTRUDED DRAINABLE LOUVER