


MSLGP - MAXIMUM SECURITY LATTICE GRILLE PERFORATED

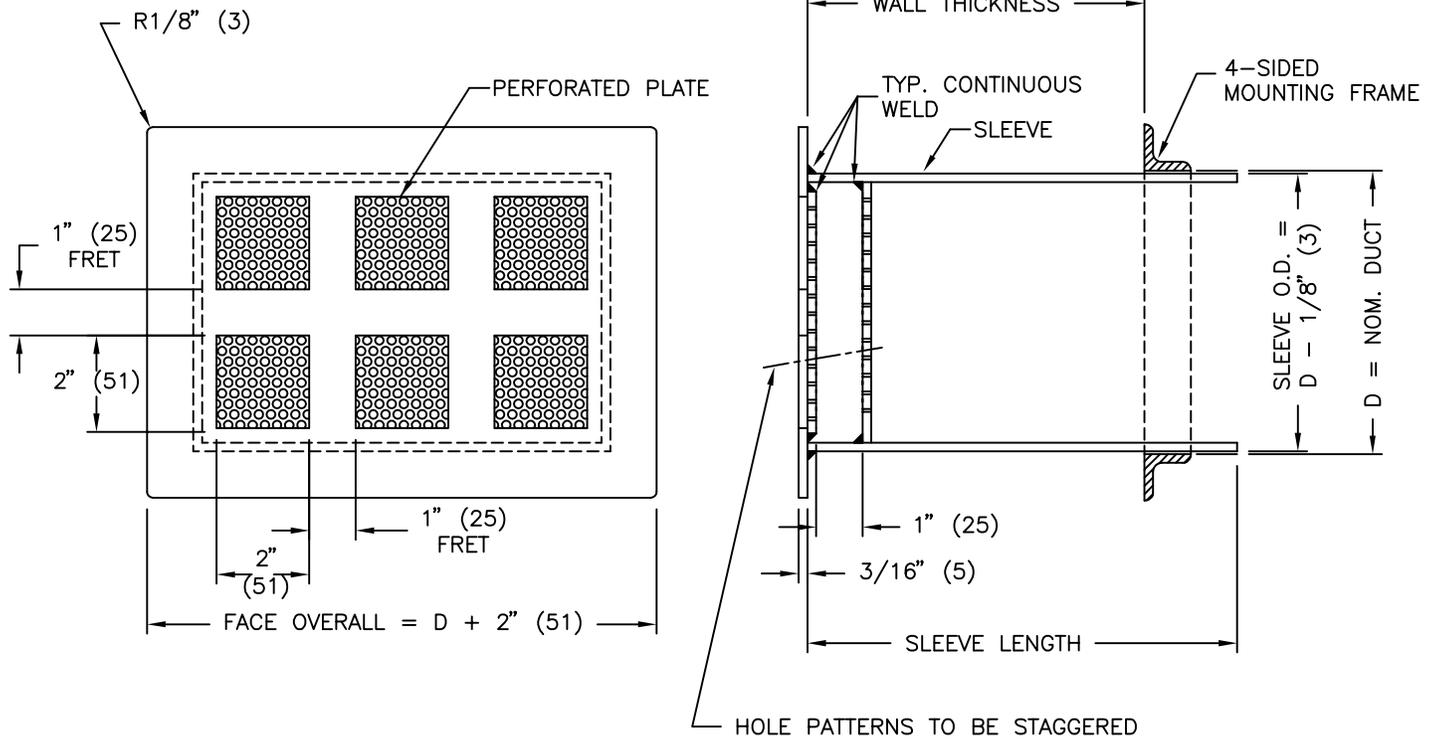

STANDARD CONSTRUCTION:

FACE PLATE:

FP187 3/16" (5) HOT ROLLED STEEL (HRS)
 2" (51) SQ. HOLES WITH 1" (25) FRET (PATTERN L1)
 12 GA. HRS PERFORATED PLATE, 3/16" (5) DIA. HOLES
 STAGGERED 60° ON 5/16" (8) CENTERS CONTINUOUSLY
 WELDED TO LATTICE FACE

BACKER PLATE:

BP12 12 GA. HRS, 3/16" (5) DIA. HOLES STAGGERED 60°
 ON 5/16" (8) CENTERS CONTINUOUSLY WELDED TO
 SLEEVE 1" (25) FROM FACE PLATE

SLEEVE:

S187 3/16" (5) HRS, LENGTH AS REQUIRED,
 CWS CONTINUOUSLY WELDED SEAMS

4-SIDED MOUNTING FRAME:

MF1 1" x 1" x 3/16" (25 x 25 x 5) HRS ANGLE
 (SHIPPED LOOSE FOR FIELD WELDING)

OPTIONS & ACCESSORIES:

DAMPER: REAR OPERATED VCS3B
 OPTION 3BR (MOUNTED IN CENTER OF SLEEVE)

FINISH:

B12 WHITE
 (OPTIONAL FINISHES AVAILABLE)

NOTES:

- MINIMUM SIZE = 6" x 6" (152 x 152)
- MAXIMUM SIZE = 30" x 30" (762 x 762)
- FACTORY TOLERANCE ±1/32" (1)
- SLEEVE LENGTH MUST BE SPECIFIED ON ORDER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]
ENGINEER:		
CUSTOMER:		233557
SUBMITTAL DATE:	SPEC. SYMBOL:	2013/10/22

MSLGP
 MAXIMUM SECURITY
 LATTICE GRILLE
 PERFORATED