


**VCS3BSS OPPOSED BLADE VOLUME CONTROLLER**

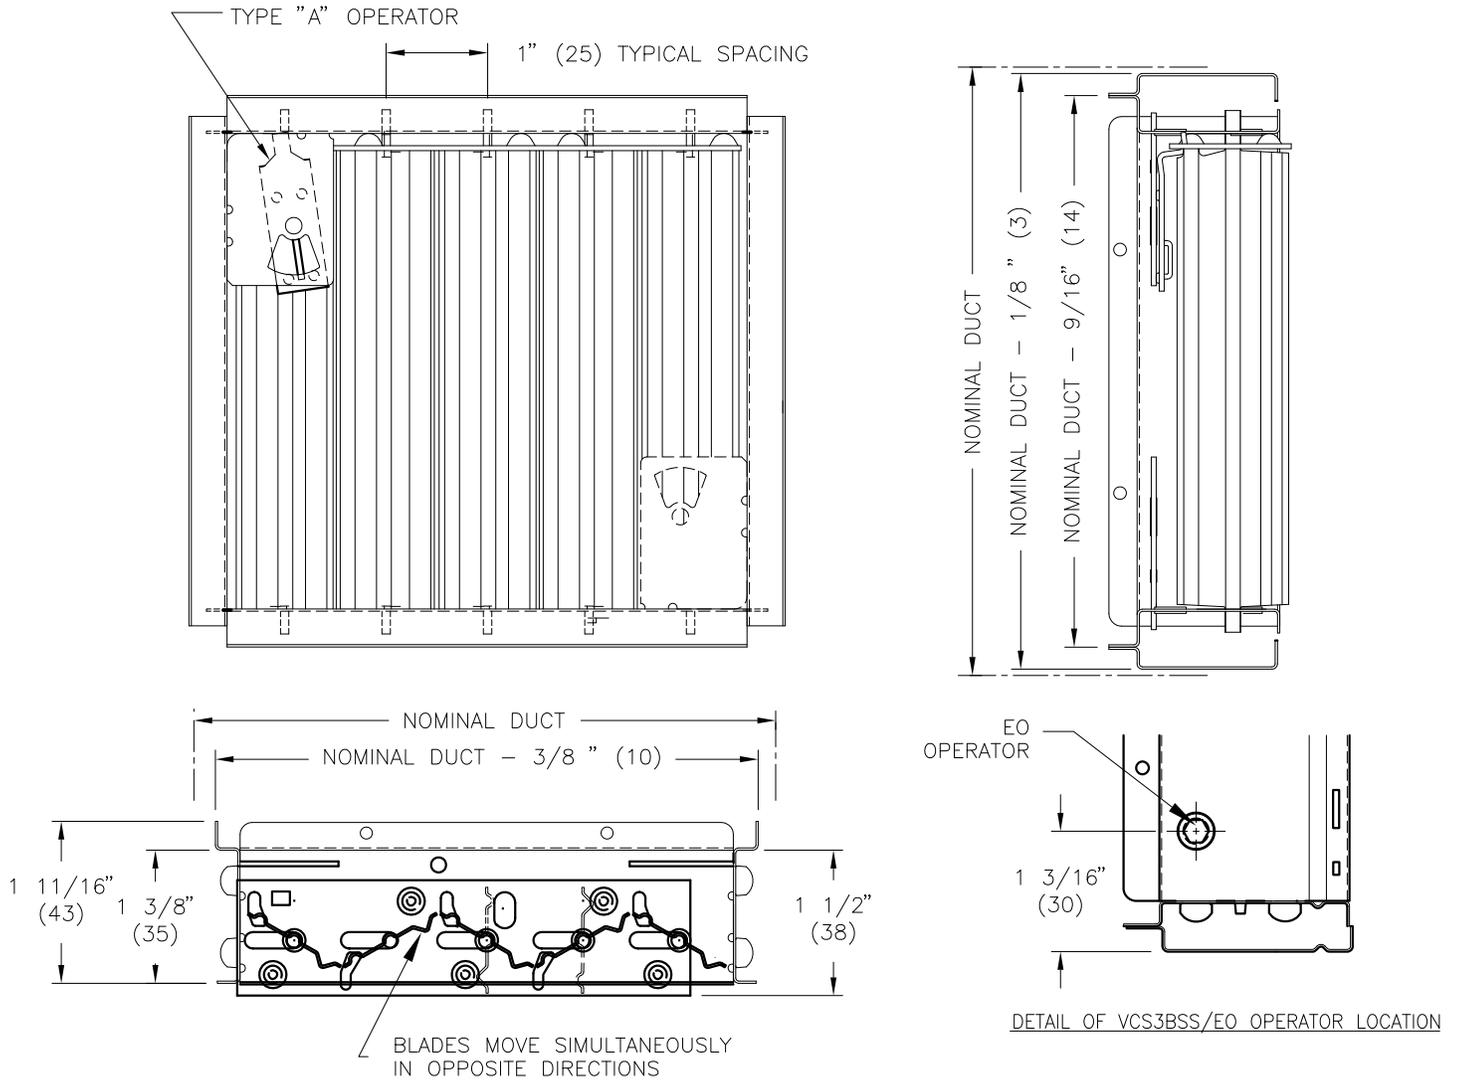

**NOTES:**

- VCS3BSS WITH A OPERATOR IS FOR REMOTE MOUNTING IN A DUCT AS A SEPARATE UNIT IN DUCT BEHIND A GRILLE
- EO OPERATOR IS FOR REMOTE MOUNTING IN A DUCT AS A SEPARATE UNIT, ACCESSIBLE THROUGH A ROUND HOLE IN THE DUCT (ACCESS HOLE BY INSTALLER)
- TYPE "A" OPERATOR MIN SIZE = 4"(102) x 3"(76)
- TYPE "EO" OPERATOR MIN SIZE = 4"(102) x 3"(76)
- MINIMUM SIZE = 4"(102) x 2 1/2"(64)
- MAXIMUM SIZE = 24"(610) x 18"(457)
- UNITS LENGTH (DIMENSION PERPENDICULAR TO BLADE) AVAILABLE IN 1" (25) INCREMENTS ONLY
- UNITS WIDTH (DIMENSION PARALLEL TO BLADE) AVAILABLE IN FRACTIONAL SIZES
- FACTORY TOLERANCE ± 1/32" (1)

**MATERIAL:**

- STAINLESS STEEL

**FINISH:**

- 2B - MILL COLD ROLLED FINISH

**OPERATOR:**

- A - SLOTTED OPERATOR
- EO - EXTERNAL HEX OPERATOR

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

<b>PROJECT:</b>		<b>PRICE®</b>	
<b>ENGINEER:</b>			<b>VCS3BSS</b> STAINLESS STEEL OPPOSED BLADE VOLUME CONTROLLER
<b>CUSTOMER:</b>			
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	2012/07/20	