


VCR8SS - FULL FLOW DAMPER DUCT MOUNTED

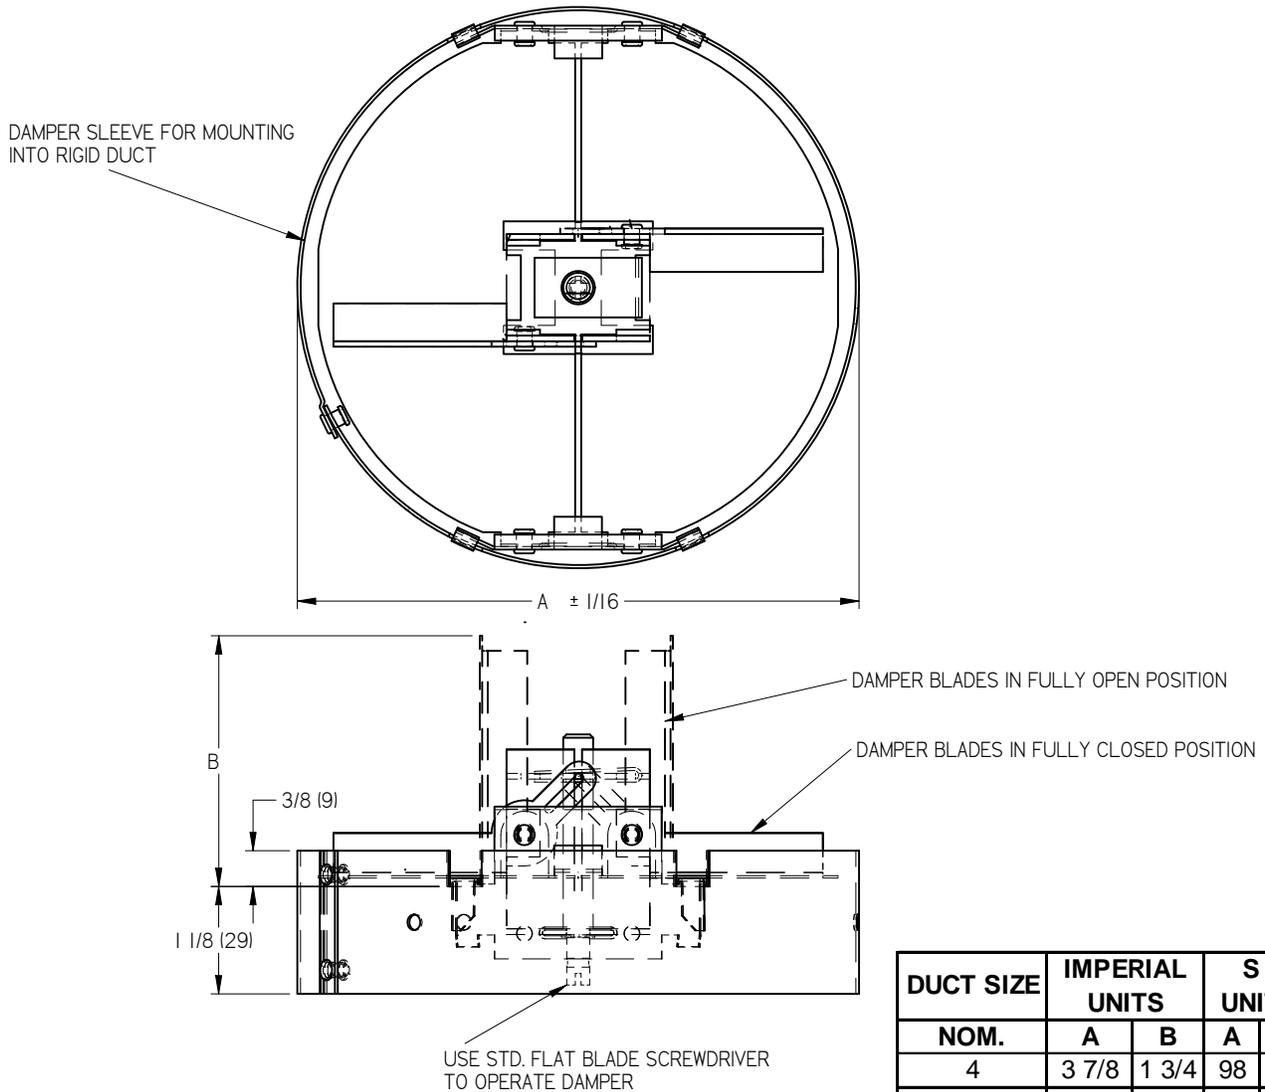

MATERIAL:
 STAINLESS STEEL
 PLATED SPRING STEEL MOUNTING CLIP AND PLATED STEEL OPERATOR SHAFT.

FINISH:
 □MILL

- NOTES:**
- DAMPER CONTROLS AIR VOLUME FROM FULL OPEN TO FULL CLOSED.
 - DAMPER MOUNTS DIRECTLY INTO RIGID DUCT, SIZE 5 TO 16 HAVE 3-MOUNTING HOLES, SIZE 4 HAS 2-MOUNTING HOLES.
 - RIGID DUCT APPLICATION ONLY.

DUCT SIZE NOM.	IMPERIAL UNITS		S I UNITS	
	A	B	A	B
4	3 7/8	1 3/4	98	44
5	4 7/8	2 3/4	124	57
6	5 7/8	2 3/4	150	70
7	6 7/8	3 3/4	175	82
8	7 7/8	3 3/4	200	95
10	9 7/8	4 3/4	250	120
12	11 7/8	5 3/4	302	146
14	13 7/8	6 3/4	352	171
15	14 7/8	7 3/4	378	184
16	15 7/8	7 3/4	403	197

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		
ENGINEER:		
CUSTOMER:		 241592
SUBMITTAL DATE:		2013/08/26
SPEC. SYMBOL:		VCR8SS FULL FLOW DAMPER DUCT MOUNTED