


NSE1

1.5" DEEP, 29° FIXED BLADE EXTRUDED NON-DRAINABLE LOUVER




NSE1

1.5" Deep, 29° Fixed Blade Extruded Non-Drainable Louver

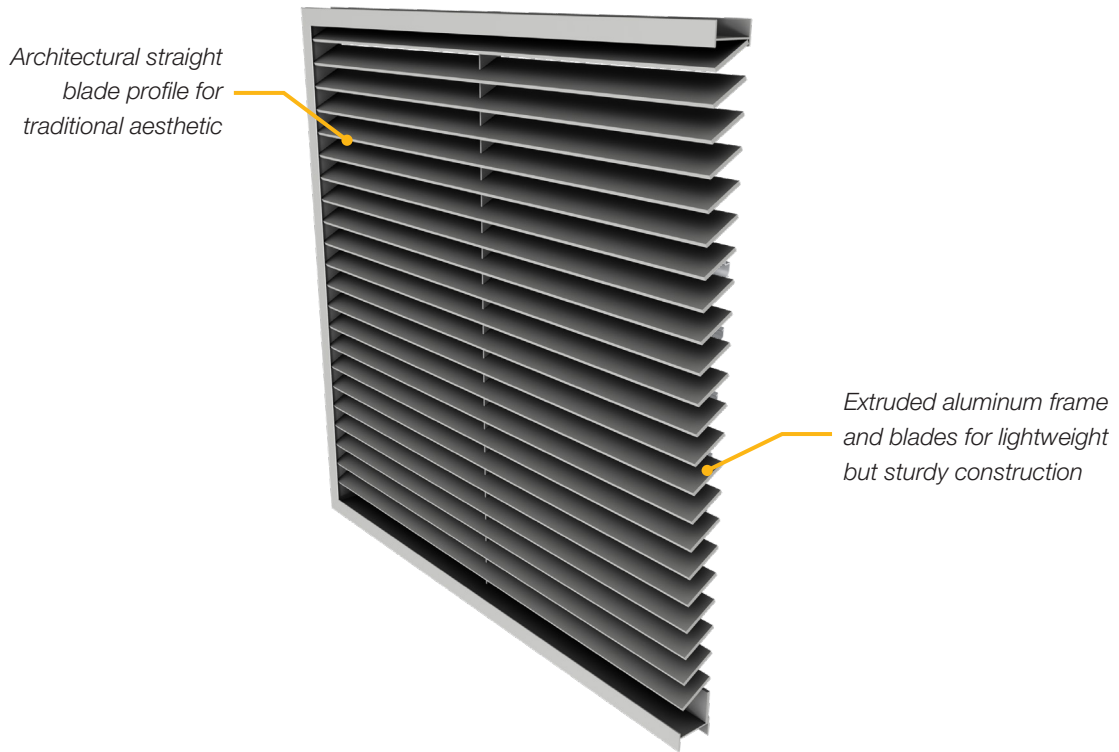

NSE1 1.5" Deep, 29° Fixed Blade Extruded Non-Drainable Louver

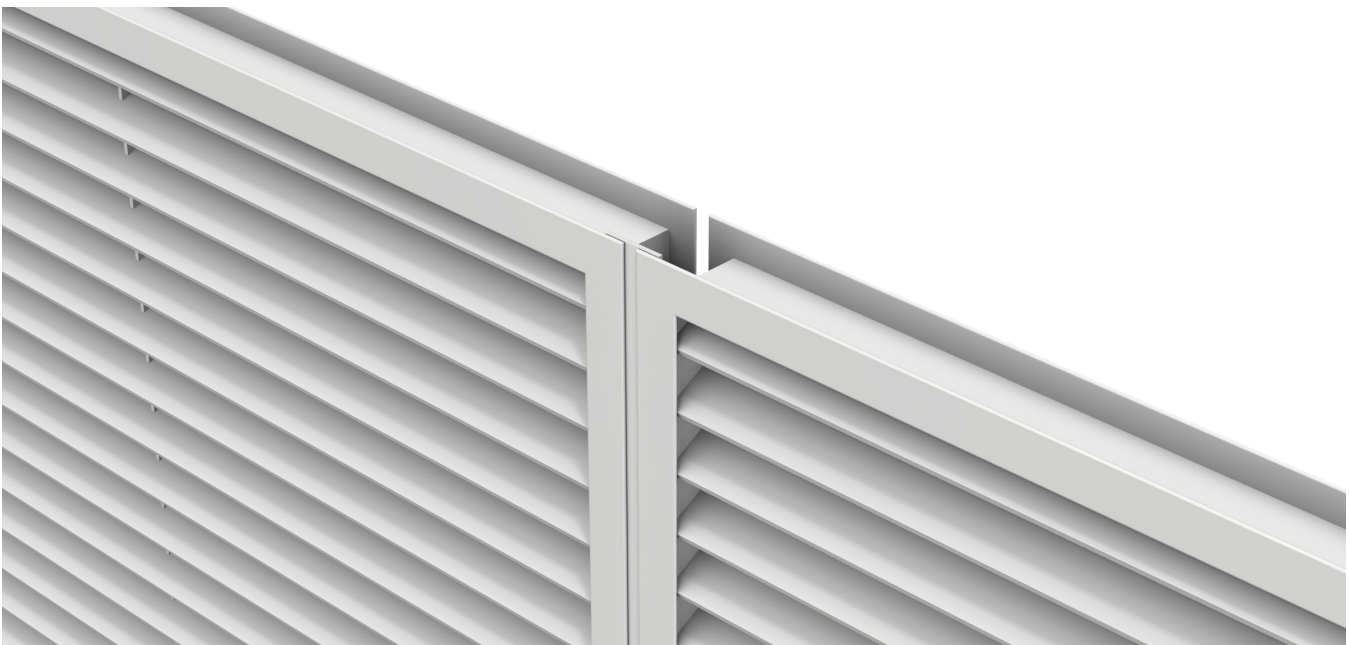

Standard Blade

NSE1

1.5" Deep, 29° Fixed Blade Extruded Non-Drainable Louver

OPTIONS

- + **Sills:** Extended sill (loose) 14 gauge aluminum
- + **Mullions:** Visible formed aluminum mullions
- + **Blank-offs/Insulation:** Aluminum blank-offs available with or without insulation – insulation available in 1" – 4" (25 mm – 102 mm) thickness
- + **Mounting/Flanges:** Perimeter flanges, mounting angles, masonry straps or glazing adapters. Standard flanges are 1.5" (38 mm); other sizes from 0.5" (13 mm) to 4" (102 mm) are available.
- + **Screens:** 0.5" x 0.5" (12 mm x 12 mm) 16 gauge expanded aluminum bird screen with or without frame; insect screens also available
- + **Finishes:** Baked Enamel (Duracron, Duranar, Duranar-XL), Prime Coat, Clear Anodized, Colour Anodized or Custom Finish. Colours must be selected from a Price finishes chart or provided with a colour sample.

TYPICAL APPLICATION

Price NSE1 fixed blade non drainable louvers feature alloy 6063-T5 extruded 1.5" aluminum blades positioned at a 29° angle, optimizing air performance in a compact streamlined unit.

FEATURES

- + Straight blade profile
- + All welded construction
- + 0.125" (3 mm) extruded aluminum blades and frames
- + 0.064" (1.6 mm) extruded aluminum frames
- + Nominal 65.3% free area, based on 48" x 48" (1219 mm x 1219 mm) louver



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at priceindustries.com. The complete Price product catalog can be viewed online at priceindustries.com.