

Fire Damper c/w Micro Switch

Model

Static Fire Damper **FD-MS**



Features:

- Narrow 2³/₁₆" (56mm) or 1¹/₂" (38mm) frame
- Other fusible links 212°F.
- 1¹/₂ hr. rating standard.
3 hr. optional vertical only.
Max. size: 48"w x 48"h (1219mm x 1219mm)

UL/ULC Approved For Use in Static Systems Where The Fan Shuts Down in the Event of a Fire.

Requirements vary for each job. Please specify type of switch required. 15 amp. single pole double throw switch shown.

All moving parts of the damper must be inspected and cycled at intervals not greater than every six months and in accordance with the latest edition of NFPA 90A, 92A, local codes and the actuator manufacturer. In addition, fuse links shall be removed and inspected for corrosion. Dry lubricants are recommended.

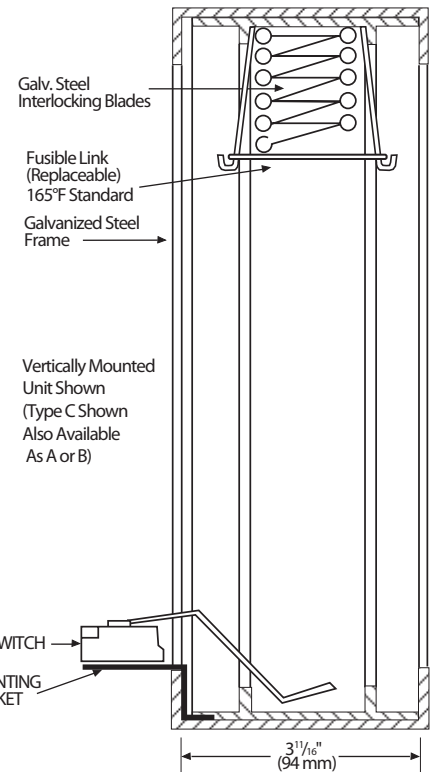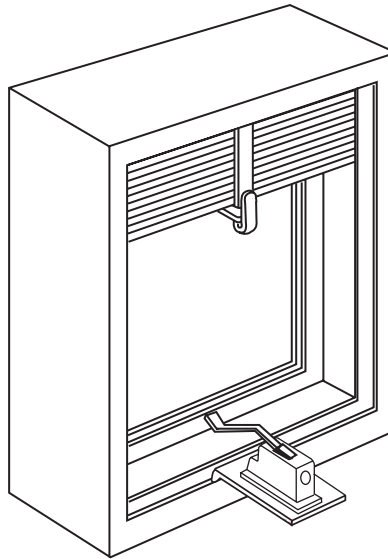

LISTED AND LABELLED BY :



DESIGNED AND TESTED IN ACCORDANCE WITH UL-555 AND ULC-S112. MEETS ALL NFPA-90A REQUIREMENTS FOR FIRE DAMPERS.

PROJECT:			
ENGINEER:			
CUSTOMER:		Jul / 06	
SUBMITTAL DATE:	SPEC. SYMBOL:	245000	