


# Linear Light

The Linear Light is low glare fixture which provides even illumination throughout a space. It can be used in a variety of applications including offices, hospitality or lobby spaces. Used in combination with the Node Multisensor, these Linear Lights are capable of dimming in response to daylight, space use, wall switch or network command.

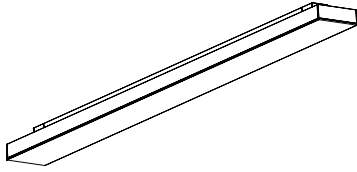

## Product Features

- Modular mechanical and electrical connection to the Node system
- Dimmable from 0%, 5 –100%
- Easy to install
- Easy to maintain
- EEL Rating: A++
- L70 Lumen Maintenance: 50,000 hours

## Specifications

Mounting Style	Length	Width	Height
Recessed Channel	1154 mm /45.40 in.	100 mm /3.94 in.	58.5 mm /2.30 in.
Flush Channel	1154 mm /45.40 in.	100 mm /3.94 in.	58.5 mm /2.30 in.

Luminaire Power	Maximum Current	Nominal Voltage	Luminaire Flux	Source Flux	Maximum Value	Efficacy
28.0 W	830 mA	33.7 V	3638 lm	3638 lm	566.37 cd/klm	129.94 lm/W

### Color Temperature

- 3000K
- 3500K
- 4000K

### CRI

- >80

### UGR

- 19

### Certification

- CE (Europe)
- ETL (USA)
- CSA (Canada)

### Construction

- Housing material: Aluminium

### Lamp Type

- LED

### Energy Consumption

- 30.80 kWh/100h

### Driver

- Sold separately

### Polar Curve

