

21, 22 SUPPLY GRILLES & REGISTERS

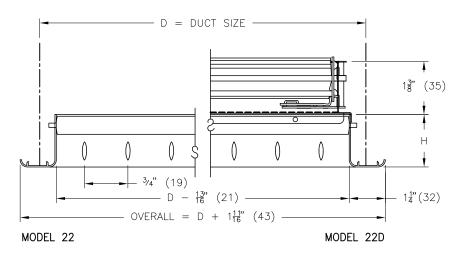


CORE STYLES:

☐ 21 SINGLE DEFLECTION



☐ 22 DOUBLE **DEFLECTION**



FINISH:

☐ B12 WHITE (OPTIONAL FINISHES AVAILABLE)

MATERIAL:


• ALUMINUM CONSTRUCTION

OPTIONS:

- FOR ADDITIONAL OPTIONAL MOUNTING OR BORDERS REFER TO SHEET 2
- ☐ C/W COATED STEEL OPPOSED BLADE DAMPER (SPECIFY 21D OR 22D)
- ☐ C/W ALUMINUM OPPOSED BLADE DAMPER (SPECIFY 21DAL OR 22DAL)

BORDERS:

☐ C CURVED FACE




- H=15/16"(33) STYLE 21
- H=1¹³/16"(46) STYLE 22

☐ F FLAT FACE

- H=11/4"(32) STYLE 21
- H=2"(51) STYLE 22

☐ SF - STEEL FRAME



- H=15/16"(33) STYLE 21
- H=21/16"(52) STYLE 22

NOTES:

- STANDARD CONSTRUCTION WITH A MULLION: A MULLION IS PROVIDED WHEN NOMINAL SIZE GRILLE DIMENSIONS EXCEED 20" (508).

 • LOUVER BLADES — INDIVIDUALY
- ADJUSTABLE.
- TYPE A FASTENING COUNTERSUNK SCREW HOLES FOR NO.8 S.M.S. PER FACTORY STANDARD. (SCREWS SUPPLIED)
- TYPE H FASTENING—FOR ED APPLICATION PILOT HOLE FOR PAN HEAD SMS. SCREW FACTORY STANDARD (SCREWS SUPPLIED).
- AVAILABLE SIZE:
 MINUMUM 6" X 4" (152×102)
 MAXIMUM 36" X 96" (914×2438)
 MAXIMUM 48 X 48 (1219×1219) WITH SF FRAME
- OVERSIZED UNITS AVAILABLE c/w DUCT MOUNTING CHANNEL.

 BLADE ORIENTATION FRONT SET

 L = PARALLEL TO LONG DIMENSION.

 S = PARALLEL TO SHORT DIMENSION.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:			Price*		
ENGINEER:		M	79	21, 22 ALUMINUM SUPPLY	
CUSTOMER:		2220	00	GRILLES & REGISTERS	
SUBMITTAL DATE:	SPEC. SYMBOL:	2015/10)/29		


Submittal Sheet

21, 22 SERIES MOUNTING OPTIONS AND BORDERS

BORDERS

☐ N - NARROW MARGIN



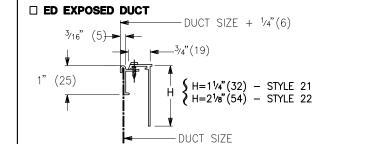


ED APPLICATION IS SUPPLIED COMPLETE WITH BORDER AND DUCT MOUNTING FRAME

• AVAILABLE WITH TYPE H OR TYPE C FASTENING

FASTENING

□ A - COUNTER SUNK SCREW


C BORDER ILLUSTRATED




☐ H-STRAIGHT SCREW HOLES (FOR ED FRAME ONLY)

□ C - CONCEALED BRACKET

C BORDER ILLUSTRATED



MOUNTING FRAMES



ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:

ENGINEER:

CUSTOMER:

SUBMITTAL DATE:

SPEC. SYMBOL:

21,22 SERIES

MOUNTING OPTIONS
AND BORDERS