

Superior Air Performance

Standard Construction

Frame

4" x .081"(102 x 2.1) Extruded Aluminum
(6063-T5)

Blades


Z Style Blades, .081"(2.1) Extruded Aluminum (6063-T5) at a 43° blade angle with approximately 4"(102) blade spacing

Finishes

MILL



Penthouse Size Limits

- MAX. INSIDE CURB DIMENSION [LENGTH] 240"[6096]
- MAX. INSIDE CURB DIMENSION [WIDTH] 120"[3048]
- MAX. HEIGHT ABOVE CURB 72"[1829]
- MIN. INSIDE CURB DIMENSION (LENGTH OR WIDTH) 12"[305]
- MIN. HEIGHT ABOVE CURB 10½"[267]

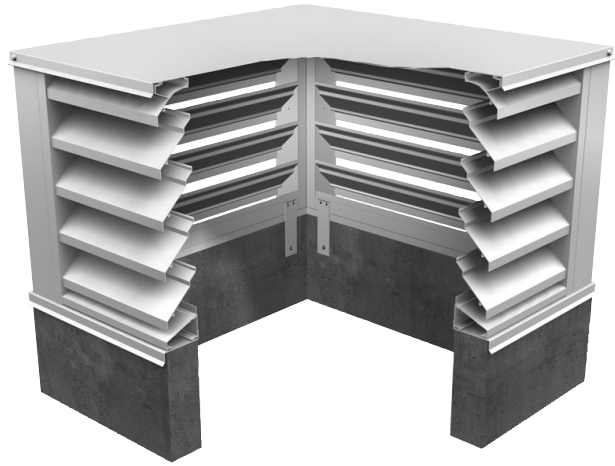

Available Options

- Extended Sill (loose) 14 GA. Aluminum
- Variety of Bird & Insect Screens
- Wide variety of Finishes including: Baked Enamel, Prime Coat, Duranar & Duranar XL, Clear & Colour Anodize
- Roof Curb
- * Select from PRICE Colour Chart or provide Colour sample to match

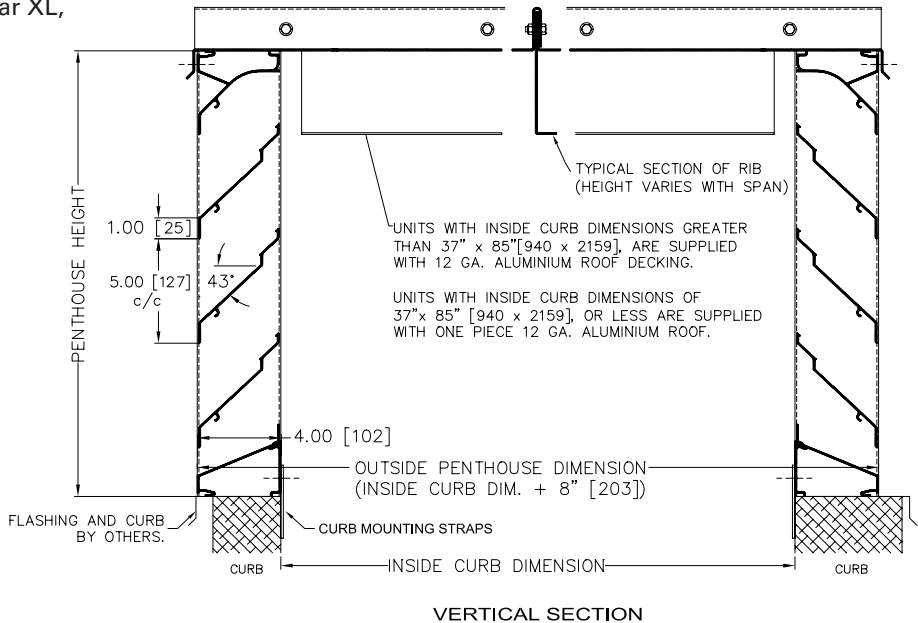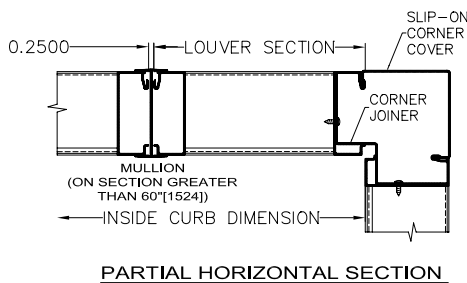

ALL-WELDED CONSTRUCTION



PROJECT			CUSTOMER			
ARCHITECT			ENGINEER			
SPEC. SYMBOL			DATE			
QTY	TAG	INSIDE CURB DIMENSION			OPTIONS	UNITS: <input type="checkbox"/> IMPERIAL <input type="checkbox"/> METRIC
		LENGTH	WIDTH	HEIGHT		