


SDGE - SPIRAL DUCT GRILLE EXTRUDED

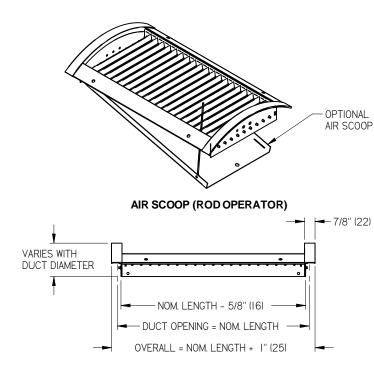

STANDARDCONSTRUCTION:

• FRAMES: EXTRUDED ALUMINUM

- BLADES: EXTRUDED ALUMINUM
- 3/4" BLADE SPACING

DAMPER OPTIONS:

□AS: AIR SCOOP (ROD OPERATOR) □ASC: AIR SCOOP (CABLE OPERATOR) □3: VCS3 COATED STEEL OPPOSED BLADE DAMPER

AVAILABLE CONFIGURATIONS:

DOUBLE DEFLECTION, FRONT BLADES PARALLEL TO LENGTH
 DOUBLE DEFLECTION, FRONT BLADES PARALLEL TO WIDTH
 SINGLE DEFLECTION, BLADES PARALLEL TO LENGTH

□ SINGLE DEFLECTION, BLADES PARALLEL TO WIDTH

FINISH:


□ B12 WHITE (OPTIONAL FINISHES AVAILABLE) □ AC CLEAR ANODIZED

FASTENING OPTIONS & ACCESSORIES:


• "A" MOUNTING STANDARD

NOTES:

NOMINAL LENGTHS AVAILABLE IN 1" INCREMENTS. FOR ONE-PIECE CONSTRUCTION: MIN. NOMINAL LENGTH = 6" MAX. NOMINAL LENGTH = 36"
FACTORY TOLERANCE +/- 1/32" (1)



AIR SCOOP (CABLE OPERATOR)



Available Sizes						
Duct Dia.	Nom. Widths					
	3	4	6	8	10	12
6	Х	Х				
8	Х	Х	Х			
10	Х	Х	Х	Х		
12	Х	Х	Х	Х	Х	
14	Х	Х	Х	Х	Х	Х
16	Х	Х	Х	Х	Х	Х
18	Х	Х	Х	Х	Х	Х
20	Х	Х	Х	Х	Х	Х
22	Х	Х	Х	Х	Х	Х
24	Х	Х	Х	Х	Х	Х
26	Х	Х	Х	Х	Х	Х
28	х	х	х	х	Х	х
30	х	х	х	х	Х	х
32	х	х	х	х	Х	х
36	Х	Х	Х	Х	х	х

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER. PROJECT: ENGINEER: CUSTOMER: SUBMITTAL DATE: SPEC. SYMBOL: DEC 2012



