

STANDARD CONSTRUCTION

CONSTRUCTION

ALL WELDED

FRAME

 4.00in x .081in [102mm x 2.1mm] EXTRUDED ALUMINUM (6063-T5) CHANNEL FRAME

BLADES

 Z STYLE BLADES, .081in[2.1mm] EXTRUDED ALUMINUM (6063-T5) 39° BLADE ANGLE, 4.00in[102mm] BLADE SPACING

FINISH

MILL

MINIMUM SECTION SIZE

9.00in W x 9.50in H [229mm x 241mm]

MAXIMUM SECTION SIZE

SIZING NOMINAL ACTUAL

SECTION

OPTION)

FXTFRIOR

CB: CONTINUOUS BLADE

(CONCEALED MULLIONS


- ONE PIECE CONSTRUCTION 72in W x 120in H [1829mm x 3048mm] OR 120in W x 72in H [3048mm x 1829mm]
- · LARGER LOUVERS WILL REQUIRE FIELD ASSEMBLY OF MULTIPLE SECTIONS AND MAY REQUIRE ADDITIONAL STRUCTURAL SUPPORT BY OTHERS
- INSTALLATION HARDWARE & STRUCTURAL REINFORCING MEMBERS ARE NOT PROVIDED BY PRICE UNLESS OTHERWISE INDICATED.



Price Industries certifies that the ZE439 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program The AMCA Certified Seal applies to air performance ratings.



CHANNEL FRAME "A" MOUNTING SHOWN FOR OTHER MOUNTING METHODS SEE 274240

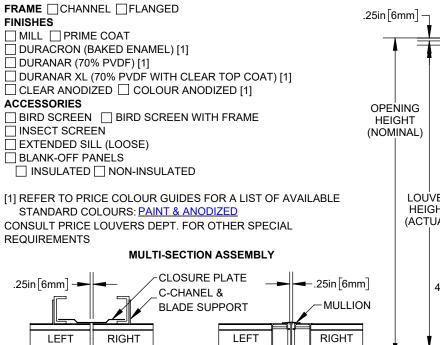

SECTION

(STANDARD)

HEAD OPTIONAL **EXTERIOR** SCREEN / BLANK-OFF 2.25in [57mm] **ALUMINUM** 1.00in 25mm C-CHANNEL **BLADE SUPPORT** SECTION SHOWN IS **GREATER THAN 72in** 399 [1830mm] WIDE LOUVER **HEIGHT** (ACTUAL) 4.00in [102mm] LOUVER DEPTH SECTION SHOWN 4.00in [102mm] IS LESS THAN OR **BLADE EQUAL TO 72in SPACING** [1830mm] WIDE PERIMETER CAULKING BY OTHERS SILL ☐ VISIBLE VERTICAL MULLIONS [∠]1.5in[38mm]

FLANGED FRAME "B" MOUNTING SHOWN

FOR OTHER MOUNTING METHODS SEE 274240 **PROJECT:** ZE439 GA **ENGINEER:** 4" (102) DEEP, 39° BLADE **EXTRUDED CUSTOMER:** 237945 **NON-DRAINABLE** SUBMITTAL DATE: SPEC. SYMBOL: **LOUVER** 2024-01-22

SECTION

EXTERIOR

SECTION