

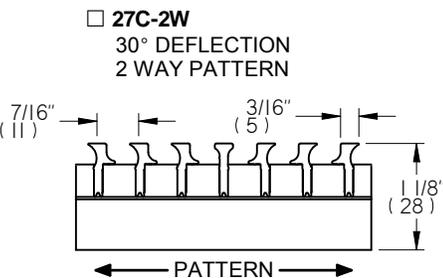
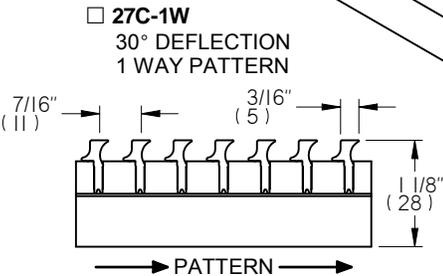


DFG - DISPLACEMENT FLOOR GRILLE

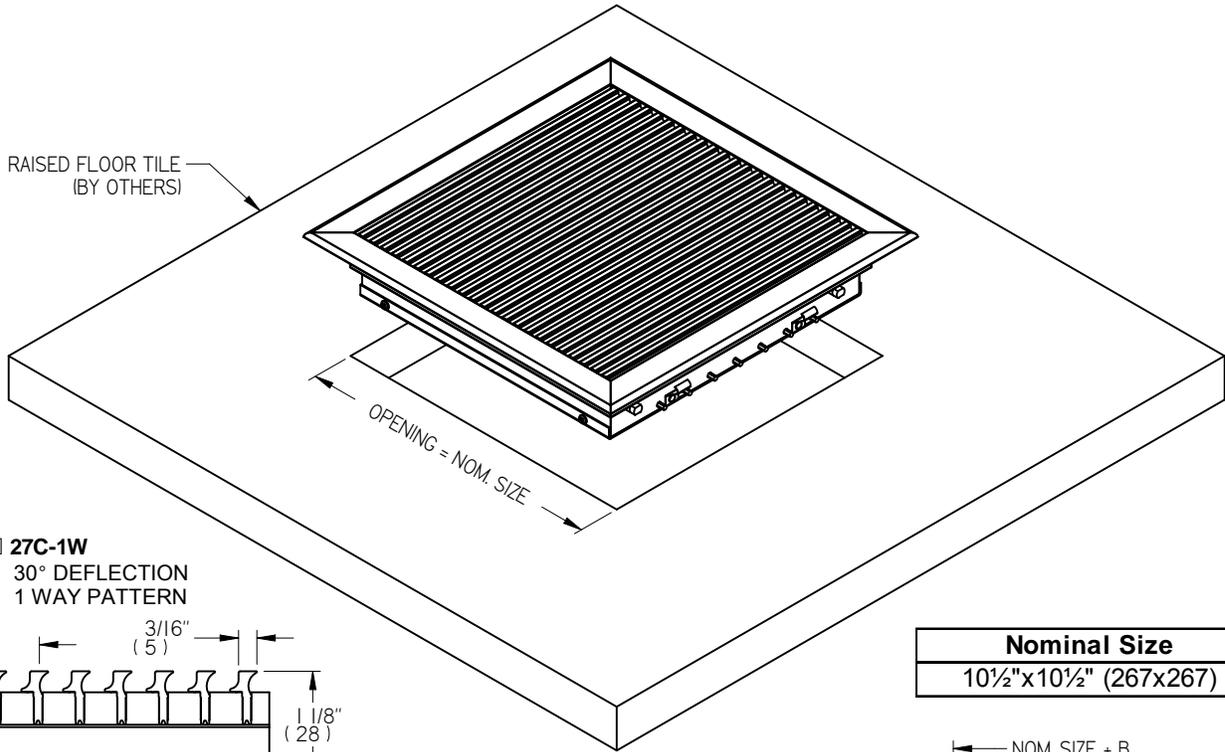

Nominal Size
10½" x 10½" (267x267)

Frame Type	A	B
<input type="checkbox"/> 750	¾" (19)	1⅛" (29)
<input type="checkbox"/> 1000	1" (25)	1⅝" (41)
<input type="checkbox"/> 1250	1¼" (32)	2⅛" (54)

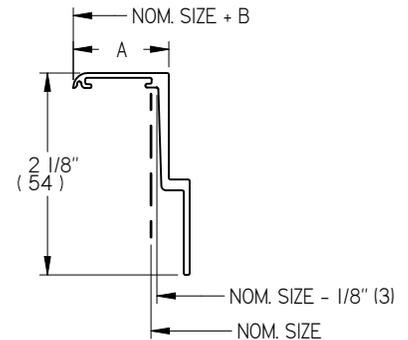

CONSTRUCTION:

- EXTRUDED ALUMINUM FRAME & CORE
- PRESSED CORE ASSEMBLY
- ADJUSTABLE DV1 DIRECTIONAL VANES
- REMOVABLE CORE WITH CORE CLIPS

FINISH:

- B12 WHITE
(OPTIONAL FINISHES AVAILABLE)

FASTENING OPTIONS:

- TYPE 0 - NO HOLES
- TYPE A - COUNTERSUNK SCREW MOUNTING
(FRAMES 1000 AND 1250 ONLY)
- TYPE H - STRAIGHT HOLES
(FRAME 750 ONLY)
- TYPE B - SPRING CLIP MOUNTING



NOTES:

- FOR USE IN RAISED FLOOR TILE SYSTEMS
- MAXIMUM CUTOUT IN FLOOR TILE MAY VARY BY TILE MODEL OR REQUIRE ADDITIONAL SUPPORT PEDESTALS, CONSULT TILE MANUFACTURER FOR GUIDANCE
- FACTORY TOLERANCE +/- 1/32" (1)
- ALL UNITS COME WITH INTERNAL BAFFLE

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		RV
SUBMITTAL DATE:		247658
SPEC. SYMBOL:		DFG DISPLACEMENT FLOOR GRILLE
		SEPT 2010

DFGL - LINEAR DISPLACEMENT FLOOR GRILLE

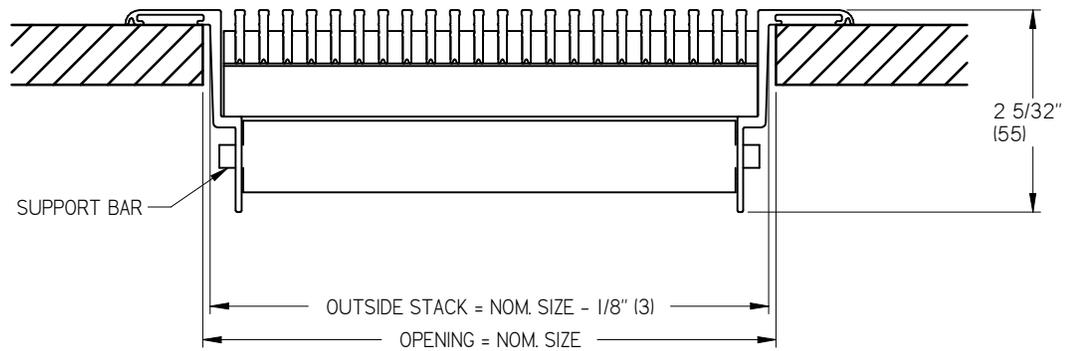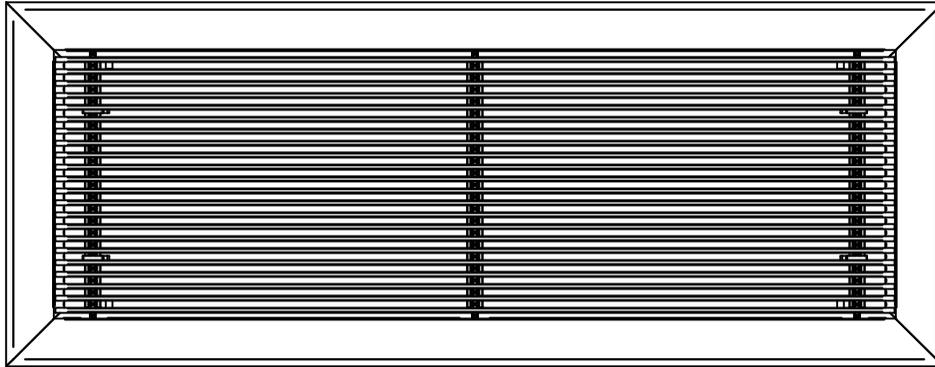

CONSTRUCTION:

- EXTRUDED ALUMINUM FRAME & CORE
- PRESSED CORE ASSEMBLY
- REMOVABLE CORE WITH CORE CLIPS

FASTENING OPTIONS:

- TYPE 0 - NO HOLES
- TYPE A - COUNTERSUNK SCREW MOUNTING (FRAMES 1000 AND 1250 ONLY)
- TYPE H - STRAIGHT HOLES (FRAME 750 ONLY)
- TYPE B - SPRING CLIP MOUNTING (SILL ONLY)

FINISH:

- B12 WHITE (OPTIONAL FINISHES AVAILABLE)
- BAFFLE TO MATCH GRILLE FINISH (STANDARD)
- OPTIONAL BLACK BAFFLE

NOTES:

- MINIMUM SIZE 12" x 6" (305 x 152)
- MAXIMUM NOMINAL WIDTH 12" (305)
- MAXIMUM SECTION LENGTH 72" (1829)
- LENGTHS OVER 72" (1829) ARE MADE IN SECTIONS AND SHIPPED WITH SPLICE PLATES TO JOIN TOGETHER FOR A CONTINUOUS APPEARANCE
- CORE BARS ARE PARALLEL TO LONG DIMENSION
- UNITS WIDER THAN 12" (305) ARE NOT RECOMMENDED FOR FLOOR APPLICATIONS
- DESIGNED TO SUPPORT FOOT TRAFFIC ONLY - NOT INTENDED TO SUPPORT MECHANICAL EQUIPMENT SUCH AS CARTS, FORKLIFTS, ETC.
- SCREW HOLE LOCATIONS PER FACTORY STANDARD
- FACTORY TOLERANCE +/- 1/32" (1) PER GRILLE SECTION
- ALL UNITS COME WITH INTERNAL BAFFLE


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	DFGL LINEAR DISPLACEMENT FLOOR GRILLE
ENGINEER:			
CUSTOMER:		250370	
SUBMITTAL DATE:	SPEC. SYMBOL:	2013/11/18	


DFGL - LINEAR DISPLACEMENT FLOOR GRILLE

CORE STYLES:


15A
0° DEFLECTION
1/4" (6) SPACING




16A
15° DEFLECTION
1/4" (6) SPACING




25C
0° DEFLECTION
7/16" (11) SPACING




26C
15° DEFLECTION
7/16" (11) SPACING



27C
30° DEFLECTION
7/16" (11) SPACING



Frame Type	A	B
<input type="checkbox"/> 750	3/4" (19)	1 1/8" (29)
<input type="checkbox"/> 1000	1" (25)	1 5/8" (41)
<input type="checkbox"/> 1250	1 1/4" (32)	2 1/8" (54)

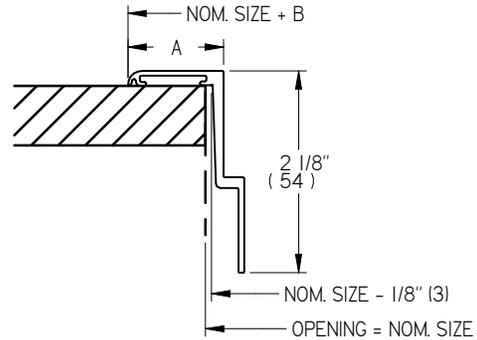

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		DS
SUBMITTAL DATE:		250370
SPEC. SYMBOL:		2013/11/18
DFGL LINEAR DISPLACEMENT FLOOR GRILLE		