

### STANDARD CONSTRUCTION

#### CONSTRUCTION

- ALL WELDED

#### FRAME

- 6.00in x .081in [152mm x 2.1mm] EXTRUDED ALUMINUM (6063-T5) CHANNEL FRAME

#### BLADES

- DRAINABLE STYLE BLADES, .081in[2.1mm] EXTRUDED ALUMINUM (6063-T5) 35° BLADE ANGLE, 4.50in[114mm] BLADE SPACING

#### FINISH

- MILL

#### MINIMUM SECTION SIZE

- 9.00in W x 10.13in H [229mm x 257mm]

#### MAXIMUM SECTION SIZE

- ONE PIECE CONSTRUCTION 72in W x 120in H [1829mm x 3048mm] OR 120in W x 72in H [3048mm x 1829mm]
- LARGER LOUVERS WILL REQUIRE FIELD ASSEMBLY OF MULTIPLE SECTIONS AND MAY REQUIRE ADDITIONAL STRUCTURAL SUPPORT BY OTHERS.
- INSTALLATION HARDWARE & STRUCTURAL REINFORCING MEMBERS ARE NOT PROVIDED BY PRICE UNLESS OTHERWISE INDICATED.



Price Industries certifies that the DE635 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Seal applies to air performance ratings.



**SIZING**  NOMINAL  ACTUAL

**FRAME**  CHANNEL  FLANGED

#### FINISHES


- MILL  PRIME COAT
- DURACRON (BAKED ENAMEL) [1]
- DURANAR (70% PVDF) [1]
- DURANAR XL (70% PVDF WITH CLEAR TOP COAT) [1]
- CLEAR ANODIZED  COLOUR ANODIZED [1]

#### ACCESSORIES


- BIRD SCREEN  BIRD SCREEN WITH FRAME
- INSECT SCREEN
- EXTENDED SILL (LOOSE)
- BLANK-OFF PANELS
- INSULATED  NON-INSULATED

[1] REFER TO PRICE COLOUR GUIDES FOR A LIST OF AVAILABLE STANDARD COLOURS: [PAINT & ANODIZED](#)  
CONSULT PRICE LOUVERS DEPT. FOR OTHER SPECIAL REQUIREMENTS

CHANNEL FRAME "A" MOUNTING SHOWN  
FOR OTHER MOUNTING METHODS SEE [274240](#)

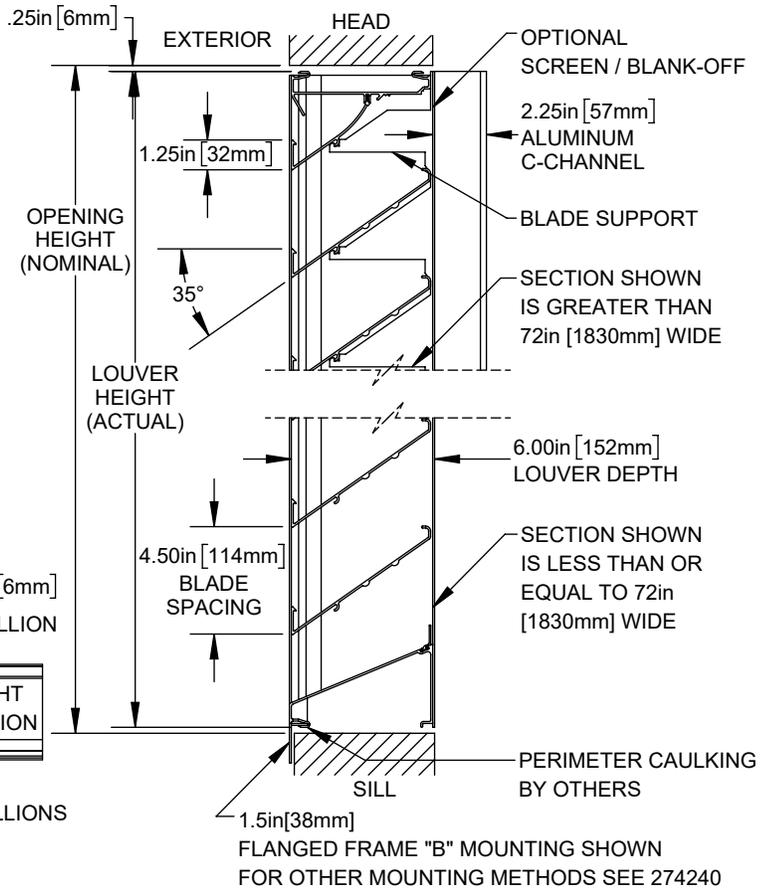

#### MULTI-SECTION ASSEMBLY

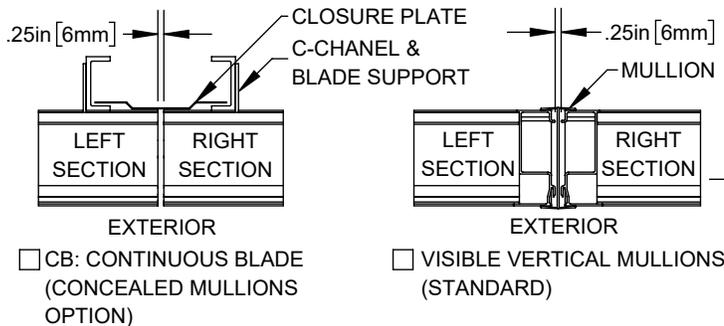

<b>PROJECT:</b>		<b>PRICE</b> <sup>®</sup>	
<b>ENGINEER:</b>			
<b>CUSTOMER:</b>		237947	<b>6" (152) DEEP, 35° BLADE EXTRUDED DRAINABLE LOUVER</b>
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	2024-01-19	