

## Commercial Control Damper - Steel

### Model

Commercial Control Damper Steel  
**CCD-RD**

### Features

- The CCD-RD series Control Dampers have been designed and tested to provide a reliable cost effective control damper where tight sealing is not of primary importance. (Note: For tight sealing dampers see Model CCD-RD-LL).
- Factory installed electric or pneumatic operators are available when dampers are ordered with motor standoff bracket.

### Standard Construction:

#### Frame:

Galvanized steel, rolled reinforcement.

22 ga. for 4" - 9" (102 mm - 229 mm) dia.

20 ga. for 10" - 24" (254 mm - 610 mm) dia.

**Blades:** Galvanized steel with welded channel reinforcement.

**Bearings:** Bronze Oilite.

**Axles:**  $\frac{3}{8}$ " (10 mm) square, plated steel.

**Finish:** Mill galvanized.

**Extended Shaft:** Removable, 6" x  $\frac{1}{2}$ " dia. (152mm x 13mm), plated steel.


**Max. Temperature:** 200°F

**Damper Sizes:** 4" to 24" (102 mm to 610 mm) diameters.

### Notes:

- Dampers fabricated  $\frac{1}{8}$ " (3 mm) smaller than given "duct" dimensions.

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

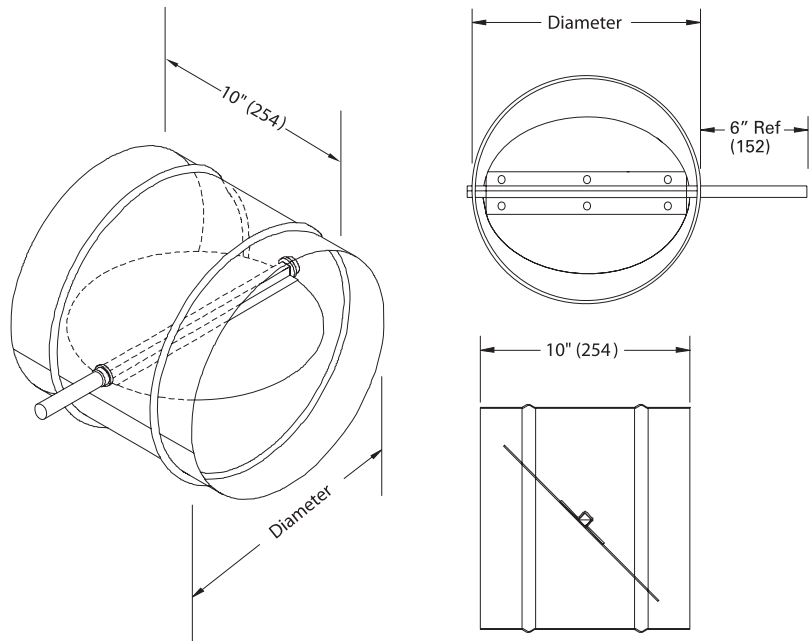

<b>PROJECT:</b>		<b>PRICE®</b>	
<b>ENGINEER:</b>			
<b>CUSTOMER:</b>		Jul / 12	
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	244968	