



DF1R RECESSED DISPLACEMENT DIFFUSER

OPENING DETAIL

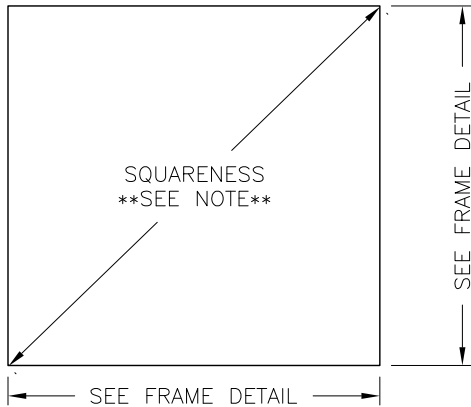


DIFFERENCE BETWEEN DIAGONALS
CANNOT EXCEED .172" [4]


FACE VIEW

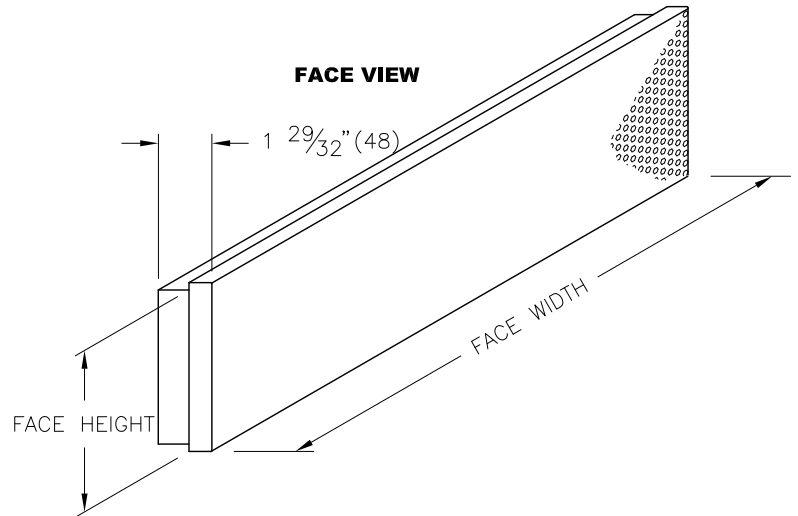

STANDARD SURFACE MOUNT DETAIL

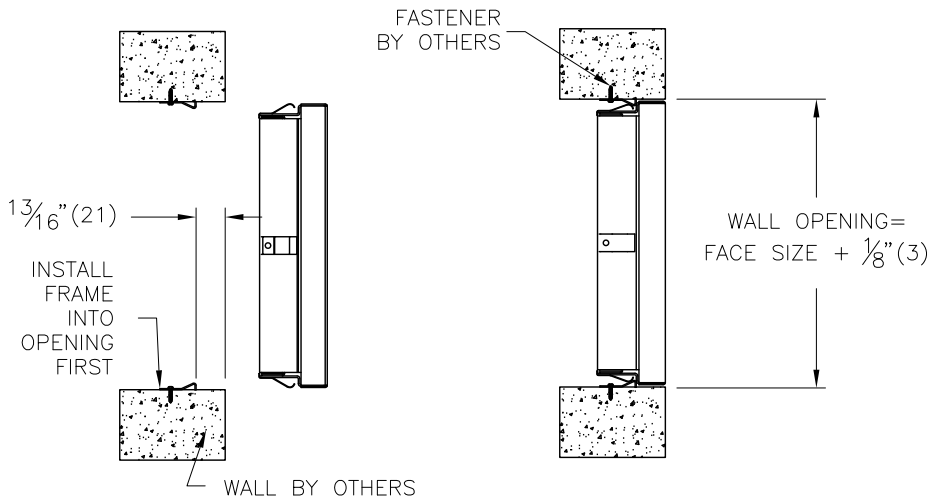

OPTIONAL MUD FRAME (MF) MOUNTING DETAIL

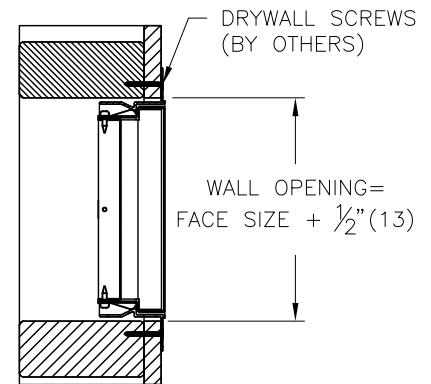

DIFFUSER:

STANDARD MATERIAL

- PERFORATED FRONT PANEL – 18 GA. STEEL.
- INSTALLATION FRAME – 24 GA. STEEL.

FINISH

- DIFFUSER – B12 WHITE (OPTIONAL FINISHES AVAILABLE)

NOTE:

- FACTORY TOLERANCE:
- OVERALL FACE DIMENSIONS $\frac{1}{16}$ " [2]
- SQUARENESS $\pm .086$ [2] OF PERFECT SQUARE
- ALL UNITS COME WITH INTERNAL BAFFLE

OPTIONAL:

- MF – MUD FRAME, ALUM EXTRUSION (MAX. 60" x 36" [1524 x 914])


SIZES

- MINIMUM 6"x4" [152 X 102]
- MAXIMUM 60"x42" [1524 X 1067]
- DIFFUSERS OF LARGER SIZES SUPPLIED IN MULTIPLE SECTIONS

INSTALLATION

- INSTALLATION MANUAL I100015

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE®	
ENGINEER:		 DF1R RECESSED DISPLACEMENT DIFFUSER	
CUSTOMER:			
SUBMITTAL DATE:			
SPEC. SYMBOL:		2016/02/01	