

MANUAL – INSTALLATION + SERVICE

Ceiling Mounted Lay-in Diffuser with Heat Cool Changeover

DF1L-HC Series

Revision: v100 – Issue Date: 03/19/21

© 2021 Price Industries Limited. All rights reserved.

PRICE[®]

CEILING MOUNTED LAY-IN DIFFUSER WITH HEAT-COOL CHANGEOVER

INSTALLATION INSTRUCTIONS

FIGURE 1 ▼



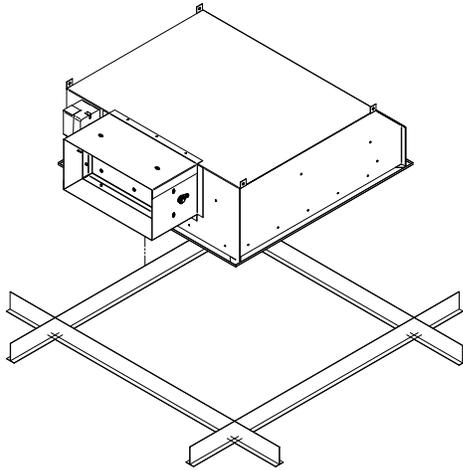





FIGURE 2 ▼

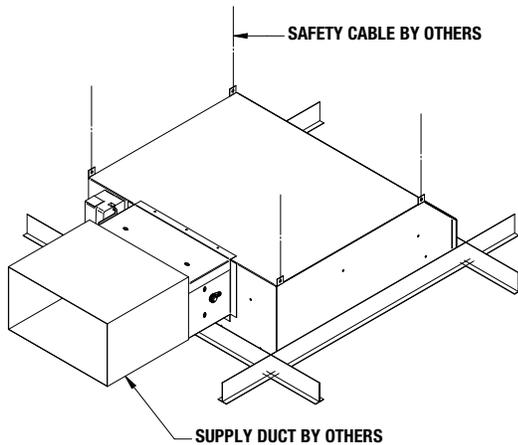

1. Fit DF1L-HC through an opening in T-bar ceiling grid at the desired location (Figure 1).
2. Rest DF1L-HC flush on T-bar ceiling grid with heating section facing in desired direction as per site drawings.
3. Fasten safety cables onto corners of DF1L-HC unit and attach to structure (Figure 2).
4. Attach supply duct into place (Figure 2).
5. Connect wiring to terminal block (Detail A).

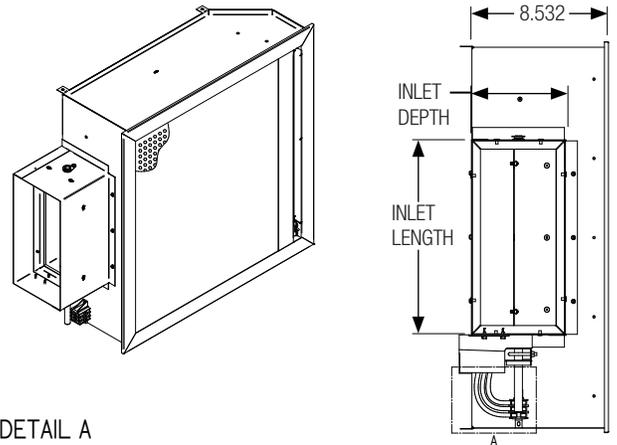

DETAIL A

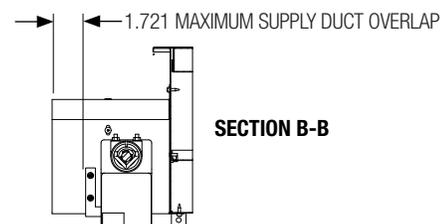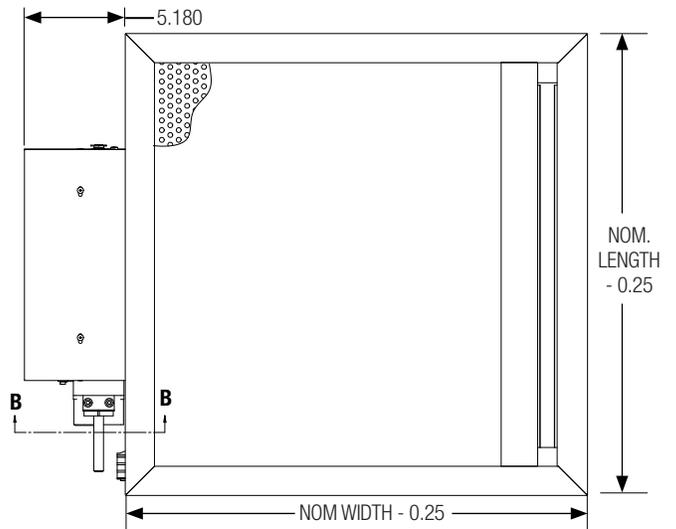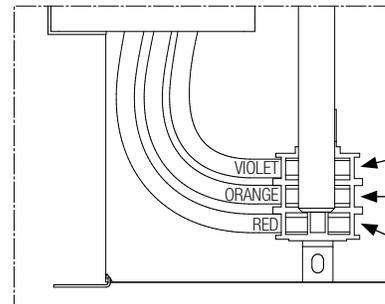

SECTION B-B

This document contains the most current product information as of this printing.
For the most up-to-date product information, please go to priceindustries.com.

© 2021 Price Industries Limited. All rights reserved.

PRICE[®]